
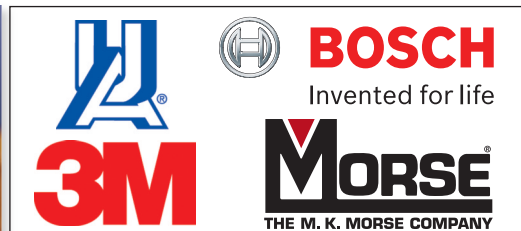


Fasteners, Anchors & Tools

FOR THE DOOR INDUSTRY

2018

Tanner

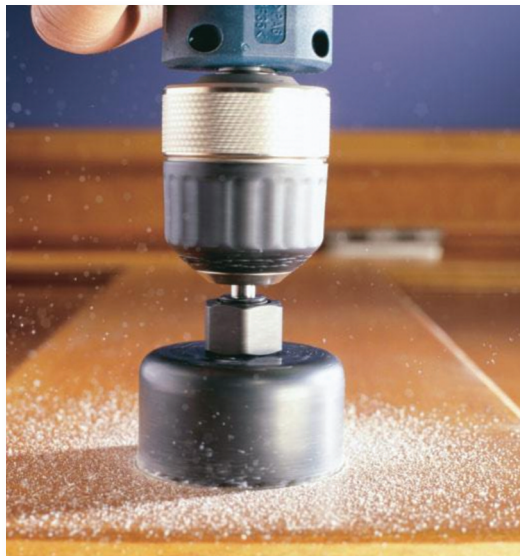

FASTENERS ANCHORING SYSTEMS

SECURITY SAFETY POWER TOOLS

CUTTING TOOLS & ABRASIVES

HAND TOOLS

email: sales@tannerbolt.com www.tannerbolt.com

714 Montauk Ave., Brooklyn, NY 11208 718 434-4500 60-01 55th Drive, Maspeth, NY 11378 718 786-2050
800 3rd Ave., Brooklyn NY 11232 929 337-1821


Fasteners, Anchors & Tools FOR THE DOOR INDUSTRY

- We offer a diverse product line of fasteners, anchors, fall protection systems and tools
- We are known nationwide for our specialty line of security fasteners and anchors
- We are a "Safety First" supplier featuring code-compliant concrete anchors for strength design, fall and drop protection systems & a wide array of personal protective equipment (PPE)



Contractors Trust Tanner

Our three convenient locations allows us to supply jobsites in all five boroughs, Long Island, Westchester, Rockland and Northern New Jersey

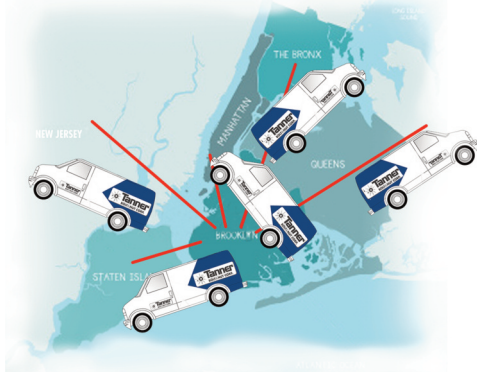

Tanner Ships Nationwide




In addition to serving the greater NYC metropolitan area with our warehouse and showroom in Brooklyn and Maspeth;

- We ship daily via UPS
- We accept Visa, Master Card, American Express, and Discover Card



Customizable Online Shopping & Shipping Solutions

- Quick setup for online accounts
- 5% discount on all online orders for Registered Users
- Complete purchase history stored online so you can review your purchases
- Forecast future product needs, and reorders
- Create a running shopping list, and then place the order to maximize your discounts and minimize freight charges

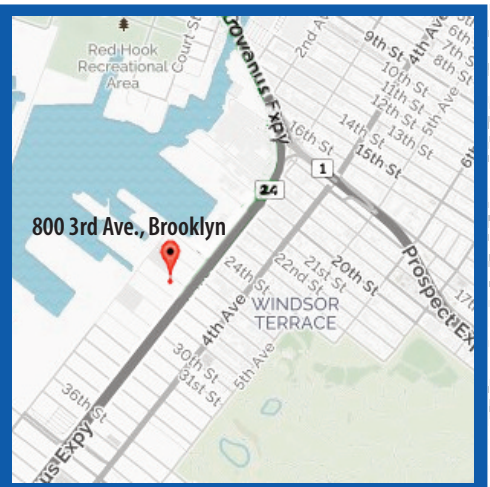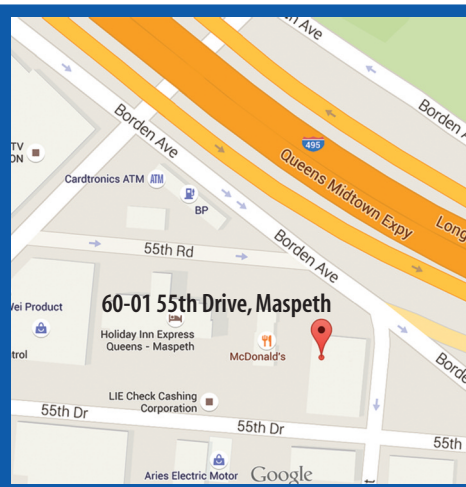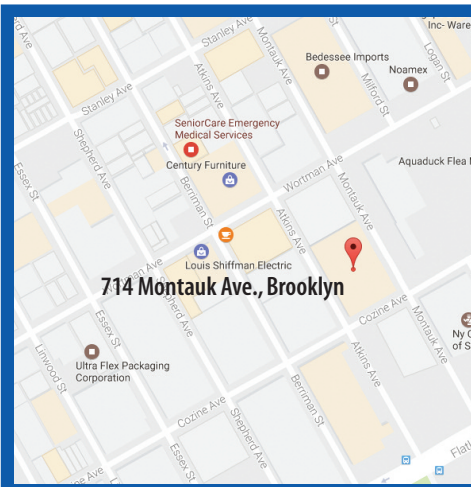

LOK-BOLT AS™ Sleeve Type Expansion Anchors

The Lok-Bolt AS™ is an all steel pre-assembled single unit sleeve anchor which can be used in concrete and masonry units.

- New compression sleeve crushes for tighter clamping forces.



- Fits easily through window and door jambs without hanging up.
- One-piece all-steel design -- Immediate loading.
- Ideal for hollow or solid concrete masonry & normal weight concrete.
- Extension sleeves can be added to create longer lengths.

LOK-BOLT AS™ FLAT HEAD

Carbon Steel & Stainless Steel, Combo Drive



ITEM CODE	SIZE	DRILL DIA.	BOX QTY.	CTN. QTY.	ITEM CODE	BUCKET QTY.
POW 05345S	POW 06174S	3/8" x 4"	3/8"	50	TB-542	500
POW 05350S	POW 06175S	3/8" x 5"	3/8"	50	TB-544	250
POW 05360S	POW 06176S	3/8" x 6"	3/8"	50	TB-545	250

LOK-BOLT AS™ EXTENDERS

Carbon Steel



ITEM CODE	SIZE	DRILL DIA.	BOX QTY.	CTN. QTY.
POW 05684S	3/8" x 1-1/4"	3/8"	50	500

UltraCon® Door Frame Fasteners




UltraCon door frame fasteners are the optimal solution for installing metal door systems to concrete, block or hollow block or wood

- One-piece, cold-formed product provides improved strength and reliability
- Oversized flat head (.690" diameter)
 - Fits pre-punched countersunk areas of metal frame, allowing full clearance
 - Provides a wider bearing surface

- Common drive system (#3 phillips) eases installation

Features & Benefits

- Twin-lead threads / Diameter: 5/16" / Point: Gimlet
- Finish: Silver Stalgard corrosion-resistant coating – provides 1000 hours of salt spray resistance per ASTM B117
- Install quickly using a 1/4" masonry drill bit and a #3 phillips bit
- Consistent performance
- Provides maximum pull-out strengths
- Eliminates need for inserts

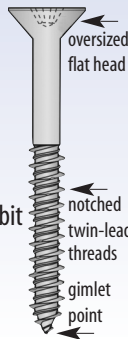

FLAT PHILLIPS HEAD

Oversized Door Frame Anchor




ITEM CODE	SIZE	DRILL BIT	BOX QTY.
ELC ELG203-050	5/16" x 3"	1/4" x 4-1/2"	50
ELC ELG204-050	5/16" x 4"	1/4" x 5-1/2"	50
ELC ELG205-050	5/16" x 5"	1/4" x 7-1/2"	50
ELC ELG206-050	5/16" x 6"	1/4" x 7-1/2"	50

ELCO® DRILL BITS

Tanged for 5/16"

SDS for 5/16"



ITEM CODE	SIZE	TUBE QTY.	ITEM CODE	SIZE	USABLE	TUBE QTY.
ELC ELT460	1/4" x 4-1/2"	5	ELC ELT680	1/4" x 6-3/4"	4"	10
ELC ELT465	1/4" x 5-1/2"	5	ELC ELT690	1/4" x 9-1/4"	6-1/2"	10
ELC ELT475	1/4" x 7-1/2"	5				

NYLON FRAME Expansion Fixing Anchors



- The ETA approval covers use in a range of solid and hollow building materials, and guarantees a secure fixing.
- A specially developed combination of plugs & screws ensures the very best handling. The plug's noticeable hold, makes installation convenient.
- Approved for a variety of solid and hollow building materials, such as concrete, brick and thermal insulation blocks



ITEM CODE	SIZE	DRIVE	MAX. FIXTURE THICKNESS	BOX QTY.	ITEM CODE	BUCKET QTY.
F1-46264	3/8" x 4"	T-40	2"	50	TB-905	500
F1-46265	3/8" x 4-1/2"	T-40	2-3/4"	50	-	-
F1-46266	3/8" x 5-1/2"	T-40	3-1/2"	50	TB-906	250
F1-46267	3/8" x 6-1/4"	T-40	4-5/16"	50	TB-907	250
F1-46268	3/8" x 7"	T-40	5-1/8"	50	-	-

3/8" WOOD SCREWS

3/8" Flat Head Wood Screws, Phillips Drive, Zinc Plated
A thread forming screw having a gimlet point and a sharp crested coarse pitch thread. Wood screws are produced with cut threads that have a tapered shank. Will produce a mating thread when assembled into wood or other resilient materials. Typically used in the door industry to install door frames into wood.



SIZE	ITEM CODE	BOX QTY.	ITEM CODE	BUCKET QTY.
#24 x 4"	24N4000FPZ	50	TB-900-A	500
#24 x 4-1/2"	24N4500FPZ	50	TB-901-A	500
#24 x 5"	24N5000FPZ	50	TB-902-A	300
#24 x 6"	24N6000FPZ	50	TB-904-A	250

MASONRY FASTENING SYSTEM

The system consists of three elements: cold formed carbon steel concrete screws, precision-cut carbide drill bits and high-quality installation tools. When all three parts of the system are used, consistent performance and maximum pull-out strengths can be realized.

- Quick installation, 2 to 3 fasteners per minute.
- Twin-lead threads mechanically link to masonry, increasing joint integrity.
- Blue Stalgard® coating provides 1000 hrs. of salt spray resistance (per ASTM B117)



UltraCon®

Flat Head Phillips Blue Stalgard®



ITEM CODE	SIZE	BOX QTY.	ITEM CODE	BUCKET QTY.
ELC ELF400	1/4" x 1-1/4"	100	TB-877	3000
ELC ELF410	1/4" x 1-3/4"	100	TB-878	2000
ELC ELF420	1/4" x 2-1/4"	100	TB-879	1500
ELC ELF430	1/4" x 2-3/4"	100	TB-880	1000
ELC ELF440	1/4" x 3-1/4"	100	TB-881	1000
ELC ELF450	1/4" x 3-3/4"	100	TB-882	1000
ELC ELF460	1/4" x 4"	100	TB-883	1000
ELC ELF470	1/4" x 5"	100	-	-
ELC ELF480	1/4" x 6"	100	-	-

• Note: All fasteners are packed 100/bx with one drill bit


INSTALLATION TOOLS



ITEM CODE	DESCRIPTION	WEIGHT
ELC ELP100	The 1000 installation tool is a two-step, multi purpose tool for installing all styles of 1/4" and 3/16" diameter UltraCon masonry fasteners. Kit contains 1 each;	
ELC ELY100	Drill Adapter	ELC ELY110 Drive Sleeve Assembly
ELC ELY140	#2 Phillips Bit	ELC ELY120 5/16" Hex Socket
ELC ELY150	#3 Phillips Bit	ELC ELY160 Phillips Bit Holder
ELC ELY210	Set Screw	ELC ELY220 1/8" Hex Key
ELC ELY125	1/4" Hex Drive Socket for 1/4" Anchor	
ELC ELY130	1/4" Hex Socket for 3/16" Anchor	

ELCO® DRILL BITS

Tanged



ITEM CODE	SIZE	TUBE QTY.
ELC ELT300	5/32" x 3-1/2"	10
ELC ELT310	5/32" x 4-1/2"	10
ELC ELT320	5/32" x 5-1/2"	10
ELC ELT405	3/16" x 3-1/2"	10
ELC ELT415	3/16" x 4-1/2"	10
ELC ELT425	3/16" x 5-1/2"	10
ELC ELT435	3/16" x 6-1/2"	10
ELC ELT445	3/16" x 7-1/2"	10

SDS



ITEM CODE	SIZE	TUBE QTY.
ELC ELT535	5/32" x 5"	10
ELC ELT555	5/32" x 7"	10
ELC ELT630	3/16" x 5"	10
ELC ELT650	3/16" x 7"	10

2 CUTTER SDS+

Carbide Bits

- Carbide tip design maximizes carbide surface contact for longer bit life
- Elongated Four Flute Helix for Faster Material Removal
- Increased Steel Prevents Breakage



2 CUTTER SDS+

Carbide



ITEM CODE EACH	SIZE	USABLE LENGTH	ITEM CODE BULK	STD. POUCH
DEW DW5402	3/16" x 4"	2"	DEW DW5402B25	25
DEW DW5403	3/16" x 6-1/2"	4-1/2"	DEW DW5403B25	25
DEW DW5404	3/16" x 8-1/2"	6-1/2"	DEW DW5404B25	25
DEW DW5405	3/16" x 10"	8"	DEW DW5405B25	25
DEW DW5406	3/16" x 12"	10"	DEW DW5406B25	25
DEW DW5416	1/4" x 4"	2"	DEW DW5416B25	25
DEW DW5417	1/4" x 6"	4"	DEW DW5417B25	25
DEW DW5418	1/4" x 8-1/2"	6-1/2"	DEW DW5418B25	25
DEW DW5424	5/16" x 6"	4"	DEW DW5424B25	25
DEW DW5427	3/8" x 6"	4"	DEW DW5427B25	25
DEW DW5437	1/2" x 6"	4"	DEW DW5437B25	25
DEW DW5446	5/8" x 8"	6"	DEW DW5446B10	10

2 CUTTER SDS+

5 pc. Carbide Bits Set



ITEM CODE DEWALT	INCLUDES
DEW DW5470	3/16" x 4-1/2" x 6-1/2", 1/4" x 2" x 4", 1/4" x 4" x 6", 3/8" x 4" x 6", 1/2" x 4" x 6"

PREMIUM PERCUSSION BITS

- 2 Cutter carbide tip maximizes carbide surface contact for longer bit life.
- Four flute design cleans debris out for fast, efficient drilling



PERCUSSION BITS



PERCUSSION BITS

Sets



ITEM CODE EACH	SIZE	USABLE LENGTH.	ITEM CODE BULK	STD. POUCH
DEW DW5221	1/8" x 3"	2"	DEW DW5221B25	25
DEW DW5227	5/32" x 6"	4"	DEW DW5227B25	25
DEW DW5222	3/16" x 3"	2"	DEW DW5222B25	25
DEW DW5223	3/16" x 6"	4"	DEW DW5223B25	25
DEW DW5224	1/4" x 4"	2"	DEW DW5224B25	25
DEW DW5225	1/4" x 6"	4"	DEW DW5225B25	25
DEW DW5228	5/16" x 6"	4"	DEW DW5228B25	25
DEW DW5230	3/8" x 6"	4"	DEW DW5230B25	25
DEW DW5235	1/2" x 6"	4"	DEW DW5235B10	10

ITEM CODE DEWALT	DESCRIPTION
DEW DW5204	4-Pc. Premium Percussion Masonry Drill Bit Set
DEW DW5205	5-Pc. Premium Percussion Masonry Drill Bit Set
DEW DW5207	7-Pc. Premium Percussion Masonry Drill Bit Set

SELF DRILLING SCREWS

Self-drilling screws or tek screws are available in a variety of head styles, thread lengths and drill flute lengths for screw diameters #6 through 5/16" -18.

OVAL PHILLIPS HEAD

Zinc Plated Glazing Bead Screws

ITEM CODE	SIZE	PT. SIZE	DRIVE SIZE	BOX QTY.	ITEM CODE	CTN. QTY.
6N100UOVZ	#6 x 1"	#2	#2	1000	6N100UOVZ/BULK	10000
6N125UOVZ/4HD	#6 x 1-1/4"	#2	#2	1000	6N125UOVZ/4HD/BULK	12000
6N125UOVZ	#6 x 1-1/4"	#2	#2	1000	6N125UOVZ/BULK	12000
8N75UOVZ	#8 x 3/4"	#2	#2	1000	8N75UOVZ/BULK	10000
8N100UOVZ	#8 x 1"	#2	#2	1000	8N100UOVZ/BULK	5000
8N125UOVZ	#8 x 1-1/4"	#2	#2	500	8N125UOVZ/BULK	5000
8N150UOVZ	#8 x 1-1/2"	#2	#2	500	8N150UOVZ/BULK	5000
10N75UOVZ	#10 x 3/4"	#2	#3	500	10N75UOVZ/BULK	8000
10N100UOVZ	#10 x 1"	#2	#3	500	10N100UOVZ/BULK	5000
10N125UOVZ	#10 x 1-1/4"	#2	#3	500	10N125UOVZ/BULK	3000
10N150UOVZ	#10 x 1-1/2"	#2	#3	500	10N150UOVZ/BULK	3000

FLAT PHILLIPS HEAD UNDERCUT

Zinc Plated, Continuous Hinge Installation Screw

ITEM CODE	SIZE	PT. SIZE	BOX QTY.	ITEM CODE	CTN. QTY.
12C68UFLZ	#12-24 x 11/16"	#2	500	12C68UFLZ/BULK	5000
12C100UFLZ	#12-24 x 1"	#3	500	12C100UFLZ/BULK	5000

Flat undercut heads are supplied to provide larger usable thread. Head height of undercut is approximately 2/3 that of standard flat head screws. Drive depths are reduced proportionately.

OVAL PHILLIPS HEAD

Zinc Plated, Door Closer Installation Screw

ITEM CODE	SIZE	PT. SIZE	BOX QTY.	ITEM CODE	CTN. QTY.
14C75UOVZ	#14-24 x 3/4"	#3	500	14C75UOVZ/BULK	4000
14C100UOVZ	#14-24 x 1"	#3	500	14C100UOVZ/BULK	3000
14C250UOVZ	#14-24 x 2-1/2"	#3	100	14C250UOVZ/BULK	1000

PAN PHILLIPS HEAD

Zinc Plated -Buckets

ITEM CODE	SIZE	BUCKET QTY.
TB-600	#8 x 1/2"	10000
TB-602	#8 x 3/4"	10000
TB-604	#8 x 1"	8000
TB-610	#10 x 1/2"	10000
TB-612	#10 x 3/4"	7000
TB-614	#10 x 1"	5000
TB-616	#10 x 1-1/2"	2500

Tanner offers its trademarked **Bucket of Bolts™!** specially developed for the contractor.



SELF DRILLING SCREWS

410 Stainless Steel - Globally Sourced

FLAT UNDERCUT PHILLIPS HEAD

ITEM CODE	SIZE	PT. SIZE	BOX QTY.	ITEM CODE	CTN. QTY.
6N50UFP4/UC	#6 x 1/2"	#2	100	6N50UFP4/UC/BULK	5000
8N75UFP4/UC	#8 x 3/4"	#2	100	8N75UFP4/UC/BULK	5000
8N100UFP4/UC	#8 x 1"	#2	100	8N100UFP4/UC/BULK	3500
10N75UFP4/UC	#10 x 3/4"	#3	100	10N75UFP4/UC/BULK	7000
10C100UFP4/UC	#10-24 x 1"	#3	100	10C100UFP4/UC/BULK	3000
12N75UFP4/UC	#12 x 3/4"	#3	100	12N75UFP4/UC/BULK	2500
12N100UFP4/UC	#12 x 1"	#3	100	12N100UFP4/UC/BULK	2500
12N150UFP4/UC	#12 x 1-1/2"	#3	100	12N150UFP4/UC/BULK	1500
14N75UFP4/UC	#14 x 3/4"	#3	100	14N75UFP4/UC/BULK	2000
14N100UFP4/UC	#14 x 1"	#3	100	14N100UFP4/UC/BULK	1500

OVAL PHILLIPS HEAD

ITEM CODE	SIZE	PT. SIZE	DRIVER SIZE	BOX QTY.
8N100UOV4	#8 x 1"	#2	#2	100
8N125UOV4	#8 x 1-1/4"	#2	#2	100
10N125UOV4	#10 x 1-1/4"	#3	#3	100

PAN PHILLIPS HEAD

ITEM CODE	SIZE	PT. SIZE	BOX QTY.
6N37UPP4	#6 x 3/8"	#2	100
6N50UPP4	#6 x 1/2"	#2	100
6N62UPP4	#6 x 5/8"	#2	100
6N75UPP4	#6 x 3/4"	#2	100
6N100UPP4	#6 x 1"	#2	100
6N150UPP4	#6 x 1-1/2"	#2	100


SECURE-BOLT® SLEEVE ANCHORS

Torx® Tamper Resistant Drive

The Secure-Bolt® Sleeve Anchor provides maximum security in concrete, block, brick and stone base materials.

FLAT HEAD

Stainless Post & Zinc Plated Anchor Body




ITEM CODE	SIZE	DRIVER SIZE	BOX QTY.
37N400AFS	3/8" x 4"	45TXH	25
37N500AFS	3/8" x 5"	45TXH	25
37N600AFS	3/8" x 6"	45TXH	25

ARCHITECTURAL SERIES SEX BOLTS TAMPER-RESISTANT

Used mainly to install hardware (kickplates, panic bars, door closers, hinges) to doors. Available in steel, aluminum, 18-8 Stainless Steel.

Sold by the set, one female sex bolt and one male flat head Phillips screw.

ITEM CODE	DOOR THICKNESS	BARREL DIAMETER	BARREL LENGTH	THREAD SIZE	THREAD DEPTH	HEAD DIAMETER	HEAD HEIGHT	MATING SCREW	MATERIAL	PLATING	BOX QTY.
37N156SASZ	1-3/4"	3/8"	1-9/16"	1/4"-20	1"	9/16"	5/32"	1/4"-20 x 1"	Steel	Zinc	25
37N156SASS	1-3/4"	3/8"	1-9/16"	1/4"-20	3/4"	9/16"	5/32"	1/4"-20 x 1"	18.8 Stainless Steel	None	25
37N156SASA	1-3/4"	3/8"	1-9/16"	1/4"-20	1"	9/16"	1/8"	1/4"-20 x 1"	Aluminum	None	25



TORX®/6-LOBE TAMPER-RESISTANT Self-Drilling Screws

Torx® Tamper-Resistant Self-Drilling Screws eliminate separate drilling and tapping operations for faster, more economical installations. The fastener is very difficult to remove without a special tamper-resistant Torx® Drive tool.

BUTTON HEAD

Case Hardened Steel, Zinc Plated

ITEM CODE	SIZE	DRIVER SIZE	BOX QTY.
8N50UBTZ	#8 x 1/2"	15TXH	100
8N75UBTZ	#8 x 3/4"	15TXH	100
8N100UBTZ	#8 x 1"	15TXH	100
8N150UBTZ	#8 x 1-1/2"	15TXH	100
10N50UBTZ	#10 x 1/2"	25TXH	100
10N75UBTZ	#10 x 3/4"	25TXH	100
10N100UBTZ	#10 x 1"	25TXH	100
10N150UBTZ	#10 x 1-1/2"	25TXH	100
12N100UBTZ	#12 x 1"	25TXH	100
12N150UBTZ	#12 x 1-1/2"	25TXH	100
14N75UBTZ	#14 x 3/4"	27TXH	100
14N100UBTZ	#14 x 1"	27TXH	100
14N150UBTZ	#14 x 1-1/2"	27TXH	100
14N200UBTZ	#14 x 2"	27TXH	100
25F75UBTZ	1/4-28 x 3/4"	27TXH	100
25F100UBTZ	1/4-28 x 1"	27TXH	100



FLAT HEAD

Case Hardened Steel, Zinc Plated

ITEM CODE	SIZE	DRIVER SIZE	BOX QTY.
8N50UFTZ	#8 x 1/2"	15TXH	100
8N75UFTZ	#8 x 3/4"	15TXH	100
8N100UFTZ	#8 x 1"	15TXH	100
8N125UFTZ	#8 x 1-1/4"	15TXH	100
8N150UFTZ	#8 x 1-1/2"	15TXH	100
10N50UFTZ*	#10 x 1/2"	25TXH	100
10N75UFTZ	#10 x 3/4"	25TXH	100
10N100UFTZ	#10 x 1"	25TXH	100
10N150UFTZ	#10 x 1-1/2"	25TXH	100
10N200UFTZ	#10 x 2"	25TXH	100
14N100UFTZ	#14 x 1"	25TXH	100
14N150UFTZ	#14 x 1-1/2"	25TXH	100
14N200UFTZ	#14 x 2"	25TXH	100



*Flat Undercut Head
• All sizes available in bulk quantities

FLAT HEAD

Zinc Plated, Continuous Hinge Installation Screw

ITEM CODE	SIZE	DRIVER SIZE	BOX QTY.	CTN QTY.
12C68UFTZ*	#12-24 x 11/16"	20TXH	100	
12C68UFTZ/BULK*	#12-24 x 11/16"	20TXH		5000

*Flat Undercut Head



OVAL HEAD

Case Hardened Steel, Zinc Plated

ITEM CODE	SIZE	DRIVER SIZE	BOX QTY.
6N125UOTZ	#6 X1-1/4"	15TXH	100
8N125UOTZ	#8 x 1-1/4"	20TXH	100



PAN HEAD

Hardened 410 Stainless Steel

410 Stainless Steel is a martensitic grade that contains 11.5% chromium, offering both exceptional wear and corrosion resistance. Used for applications that involve mild corrosion, high strength, and heat resistance.

ITEM CODE	SIZE	DRIVER SIZE	ITEM CODE	SIZE	DRIVER SIZE
6N37UPT4	#6 x 3/8"	15TXH	12N75UPT4	#12 x 3/4"	27TXH
6N50UPT4	#6 x 1/2"	15TXH	12N100UPT4	#12 x 1"	27TXH
8N50UPT4	#8 x 1/2"	20TXH	12N125UPT4	#12 x 1-1/4"	27TXH
8N75UPT4	#8 x 3/4"	20TXH	12N150UPT4	#12 x 1-1/2"	27TXH
8N100UPT4	#8 x 1"	20TXH	12N200UPT4	#12 x 2"	27TXH
8N125UPT4	#8 x 1-1/4"	20TXH	14N75UPT4	#14 x 3/4"	30TXH
8N150UPT4	#8 x 1-1/2"	20TXH	14N100UPT4	#14 x 1"	30TXH
10N50UPT4	#10 x 1/2"	25TXH	14N125UPT4	#14 x 1-1/4"	30TXH
10N75UPT4	#10 x 3/4"	25TXH	14N150UPT4	#14 x 1-1/2"	30TXH
10N100UPT4	#10 x 1"	25TXH	14N200UPT4	#14 x 2"	30TXH
10N150UPT4	#10 x 1-1/2"	25TXH	25C200UPT4*	1/4"-20 x 2"	27TXH
10N125UPT4	#10 x 1-1/4"	25TXH			
10N200UPT4	#10 x 2"	25TXH			

* Drill aluminum only • All 100 per box.



FLAT HEAD

Hardened 410 Stainless Steel

ITEM CODE	SIZE	DRIVER SIZE	ITEM CODE	SIZE	DRIVER SIZE
6N50UFT4	#6 x 1/2"	10TXH	10N250UFT4	#10 x 2-1/2"	20TXH
6N75UFT4	#6 x 3/4"	10TXH	10N300UFT4	#10 x 3"	20TXH
6N100UFT4	#6 x 1"	10TXH	12N75UFT4	#12 x 3/4"	25TXH
6N125UFT4	#6 x 1-1/4"	10TXH	12N100UFT4	#12 x 1"	25TXH
6N150UFT4	#6 x 1-1/2"	10TXH	12N125UFT4	#12 x 1-1/4"	25TXH
8N50UFT4	#8 x 1/2"	15TXH	12N150UFT4	#12 x 1-1/2"	25TXH
8N75UFT4	#8 x 3/4"	15TXH	12N200UFT4	#12 x 2"	25TXH
8N100UFT4	#8 x 1"	15TXH	12N250UFT4	#12 x 2-1/2"	25TXH
8N125UFT4	#8 x 1-1/4"	15TXH	12N300UFT4	#12 x 3"	25TXH
8N150UFT4	#8 x 1-1/2"	15TXH	14N75UFT4	#14 x 3/4"	27TXH
8N200UFT4	#8 x 2"	15TXH	14N100UFT4	#14 x 1"	27TXH
10N50UFT4	#10 x 1/2"	20TXH	14N125UFT4	#14 x 1-1/4"	27TXH
10N75UFT4	#10 x 3/4"	20TXH	14N150UFT4	#14 x 1-1/2"	27TXH
10N100UFT4	#10 x 1"	20TXH	14N200UFT4	#14 x 2"	27TXH
10N125UFT4	#10 x 1-1/4"	20TXH	14N250UFT4	#14 x 2-1/2"	27TXH
10N150UFT4	#10 x 1-1/2"	20TXH	14N300UFT4	#14 x 3"	27TXH
10N200UFT4	#10 x 2"	20TXH			

• All 100 per box.



INSTALLATION & REMOVAL TOOLS

SECURITY BITS

ITEM CODE	SIZE	HEX SIZE	LENGTH	ITEM CODE	SIZE	HEX SIZE	LENGTH
10TXH	#10	1/4"	1"	45TXH	#45	5/16"	1-3/8"
15TXH	#15	1/4"	1"	50TXH	#50	5/16"	1-3/8"
20TXH	#20	1/4"	1"	55TXH	#55	5/16"	1-3/8"
25TXH	#25	1/4"	1"	TK-TX	Kit contains one each: #10, #15, #20, #25, #27, #30 with 1/4" magnetic storage handle		
27TXH	#27	1/4"	1"				
30TXH	#30	1/4"	1"				
40TXH	#40	1/4"	1"				

• Packaged individually. Bulk packaging available.



FLAT PHILLIPS HEAD SCREWS

Head height of undercut screws is approximately 2/3 that of standard screws. Drive depths are reduced proportionately.

UNDERCUT MACHINE SCREWS

Steel, Zinc Plated

ITEM CODE	SIZE	BOX QTY.
8C50MFUPZ	#8-32 x 1/2"	100
10C50MFUPZ	#10-24 x 1/2"	100
12C50MFUPZ	#12-24 x 1/2"	100
12C75MFUPZ	#12-24 x 3/4"	100
25C50MFUPZ	1/4"-20 x 1/2"	100



TYPE F THREAD CUTTING

Steel, Zinc Plated

A thread cutting screw is a screw with machine screw thread pitch, blunt point, tapered entering threads and multiple cutting edges. Used in heavy gauge sheet metal, aluminum, zinc and lead die castings, cast iron, brass and plastic.

ITEM CODE	SIZE	BOX QTY.
10C50FFUPZ	#10-24 x 1/2"	500
10F50FFUPZ	#10-32 x 1/2"	500
12C50FFUPZ	#12-24 x 1/2"	500
12C75FFUPZ	#12-24 x 3/4"	500
25C50FFUPZ	1/4"-20 x 1/2"	500



UNDERCUT MACHINE-WOOD

A thread forming screw that has a gimlet point, as well as machine screw thread. Will produce a mating thread when assembled into wood.

ITEM CODE	SIZE	MATERIAL	BOX QTY.
8C75CFUPS	#8-32 x 3/4"	Stainless Steel	500
8C75CFUPZY	#8-32 x 3/4"	Steel Zinc Yellow	500
8C75CFUPZ	#8-32 x 3/4"	Steel Zinc Clear	500
12C75CFUPS	#12-24 x 3/4"	Stainless Steel	500
12C75CFUPN	#12-24 x 3/4"	Steel Nickel Plated	500
12C100CFUTS*	#12-24 x 1"	Stainless Steel	100



* has a Torx® Tamper-Resistant Drive

DRIVER SCREWS FOR "UL" LABELS*

Zinc Plated

ITEM CODE	SIZE	BOX QTY.
6N25TFUZ	#6 x 1/4"	1000



* Not Countersunk

LASERS



DEW DW088LG

12V Green Cross Line Laser

- Green Beam Laser Technology - 4 times brighter green laser for visibility in long range interior & exterior visibility



SPECIFICATIONS

• Battery Needs	12.0V	• Laser Beam Color	Green
• Battery Type	12 Volt	• Includes Bracket	Yes
• Batteries Included	Yes	INCLUDES	
• Overall Length (in)	18.15"	• Blow Mold Case	
• Height (in)	6.26"	• Extended Ceiling Bracket	
• Width (in)	12.91"	• 12v Battery	
• Indoor Visibility Range	100ft	• Charger	
• Accuracy	+/-0.125"	• Green Cross Line Laser	

DEW DW088LR

12V Red Cross Line Laser

- Red Beam Laser Technology



SPECIFICATIONS

• Battery Needs	4.0B	• Laser Beam Color	Red
• Battery Type	AA Batteries	• Includes Bracket	Yes
• Batteries Included	Yes	INCLUDES	
• Overall Length (in)	18.15"	• Blow Mold Case	
• Height (in)	6.2"	• Extended Ceiling Bracket	
• Width (in)	12.91"	• Battery Starter Pack	
• Indoor Visibility Range	50ft	• 4 AA Batteries	
• Accuracy	+/-0.125"	• 12V Red Cross Line Laser	

TOOLS



BOS 11255VSR

1" SDS-plus® Bulldog™ Xtreme Rotary Hammer

- Rotating brush plate - provides equal power in forward/reverse
- Rotation only, rotary hammer & hammer-only mode



SPECIFICATIONS

• Amperage	7.5	• Auxiliary D-Handle	
• Voltage	120V	• Depth Gauge	
• Chuck Design	Keyless	• Carrying Case	
• Impact Energy	2.0 (ft.lbs.) EPTA		
• No Load BPM	0 - 5,800		

BOS VAC090AH

9-Gal. Dust Extractor with Auto Filter Clean and HEPA Filter

VAC series dust extractors come with the best in class combination of air flow and suction power, ideal for dust extraction.



SPECIFICATIONS

• Air Flow	150 CFM	• 10 ft. Vacuum Hose	
• Amperage	9.5	• Bend Nozzle	
• Hose Diameter	1.37"	• Power Tool Adapter Nozzle	
• Capacity (gal)	9.0	• Cellulose Flat Filter	
• Wet / Dry	Yes	• Plastic Bag V800P (1 Bag)	

SHIMS

All a shim does is take up space. That space, levels or aligns your work, or positions objects until permanent support can be installed. Shims are used

in a variety of industries. A large range are available to meet those needs with different shapes & load-bearing properties

HORSESHOE SHIMS



ITEM CODE	SIZE	THICKNESS	COLOR	BOX QTY.
SHIM HSS51HS	3" x 4"	1/32"	Green	1000
SHIM HSS56HS	3" x 4"	1/16"	Blue	1000
SHIM HSS58HS	3" x 4"	1/8"	Red	1000
SHIM HSS54HS	3" x 4"	1/4"	Black	500
SHIM HSS53HS	3" x 4"	3/8"	White	360
SHIM HSS52HS	3" x 4"	1/2"	Brown	250
SHIM HSS55HS	3" x 4"	5/8"	Grape	225
SHIM HSS57HS	3" x 4"	3/4"	Cyan	200

U SHIMS



ITEM CODE	SIZE	THICKNESS	COLOR	BOX QTY.
SHIM US16HS	1-1/2" x 2"	1/16"	Blue	1000
SHIM US18HS	1-1/2" x 2"	1/8"	Red	1000
SHIM US14HS	1-1/2" x 2"	1/4"	Black	1000
SHIM US36HS	1-1/2" x 3-1/2"	1/16"	Blue	1000
SHIM US38HS	1-1/2" x 3-1/2"	1/8"	Red	1000
SHIM US34HS	1-1/2" x 3-1/2"	1/4"	Black	1000
SHIM US33HS	1-1/2" x 3-1/2"	3/8"	White	500
SHIM US32HS	1-1/2" x 3-1/2"	1/2"	Brown	500
SHIM US17-6HS	1-7/8" x 2-5/8"	1/16"	Blue	1000
SHIM US17-8HS	1-7/8" x 2-5/8"	1/8"	Red	1000
SHIM US17-4HS	1-7/8" x 2-5/8"	1/4"	Black	1000
SHIM US26HS	2-5/16" x 3"	1/16"	Blue	1000
SHIM US28HS	2-5/16" x 3"	1/8"	Red	1000
SHIM US24HS	2-5/16" x 3"	1/4"	Black	1000
SHIM US23HS	2-5/16" x 3"	3/8"	White	500

1-1/2" x 2" and 1-1/2" x 3-1/2" - 1/2" bolt holes,
1-7/8" x 2-5/8" - 5/8" bolt holes, 2-5/16" - 13/16" bolt holes

KEYLOT SHIMS



ITEM CODE	SIZE	THICKNESS	COLOR	BOX QTY.
SHIM KS335-6KS	3" x 3-1/2"	1/16"	Blue	1000
SHIM KS335-8KS	3" x 3-1/2"	1/8"	Red	1000
SHIM KS335-4KS	3" x 3-1/2"	1/4"	Black	500

7/16" bolt holes

STACK SHIMS




ITEM CODE	SIZE	THICKNESS	STACK THICKNESS	BOX QTY.
SHIM MS8U	1-7/8" x 3-1/8"	1/32"	1/4" Mini	2000
SHIM SS8U	1-7/8" x 3-1/8"	1/16"	1/2" Short	2000
SHIM RS16U	1-7/8" x 3-5/8"	1/16"	1" Regular	2000
SHIM XLS16U	1-7/8" x 4-1/8"	1/16"	1" Xtra Large	2000
SHIM GL16LU	1-7/8" x 5-7/8"	1/16"	1" Giant	2000

FLAT PLATE SHIMS




ITEM CODE	SIZE	THICKNESS	BOX QTY.
SHIM FPS16X2X2	2" x 2"	1/16"	2400
SHIM FPS8X2X2	2" x 2"	1/8"	2400
SHIM FPS4X2X2	2" x 2"	1/4"	1600
SHIM FPS3X2X2	2" x 2"	3/8"	1000
SHIM FPS16X2X4	2" x 4"	1/16"	1200
SHIM FPS8X2X4	2" x 4"	1/8"	1200
SHIM FPS4X2X4	2" x 4"	1/4"	720
SHIM FPS3X2X4	2" x 4"	3/8"	500
SHIM FPS16X3X3	3" x 3"	1/16"	2000
SHIM FPS8X3X3	3" x 3"	1/8"	1400
SHIM FPS4X3X3	3" x 3"	1/4"	700
SHIM FPS3X3X3	3" x 3"	3/8"	250
SHIM FPS2X3X3	3" x 3"	1/2"	370
SHIM FPS16X4X4	4" x 4"	1/16"	1600
SHIM FPS8X4X4	4" x 4"	1/8"	800
SHIM FPS4X4X4	4" x 4"	1/4"	400
SHIM FPS3X4X4	4" x 4"	3/8"	250
SHIM FPS2X4X4	4" x 4"	1/2"	200
SHIM FPS16X8X8	8" x 8"	1/16"	250
SHIM FPS8X8X8	8" x 8"	1/8"	150
SHIM FPS4X8X8	8" x 8"	1/4"	80

RUGGED CONSTRUCTION SHIMS



ITEM CODE	SIZE	THICKNESS	BOX QTY.
SHIM CS2X6-16	2" x 6"	1/16"	1600
SHIM CS2X6-8	2" x 6"	1/8"	900
SHIM CS2X6-4	2" x 6"	1/4"	475
SHIM CS4X6-6	4" x 6"	1/16"	1000
SHIM CS4X6-8	4" x 6"	1/8"	500
SHIM CS4X6-4	4" x 6"	1/4"	250
SHIM CS4X6-3	4" x 6"	3/8"	180
SHIM CS4X6-2	4" x 6"	1/2"	120
SHIM CS6X6-16	6" x 6"	1/16"	600
SHIM CS6X6-8	6" x 6"	1/8"	350
SHIM CS6X6-4	6" x 6"	1/4"	180

WEDGE SHIMS



ITEM CODE	SIZE	THICKNESS	COLOR	BOX QTY.
Tapered Wedge				
SHIM TW3	1-1/2" x 3-3/8"	1/32" to 1/4"	Black	1000
Sectional Tapered Wedge				
SHIM TW6	1-1/2" x 6"	1/32" to 3/8"	Black	600
Graduated Sectional Tapered Wedge				
SHIM TW8	1-1/2" x 8"	1/16" to 1/4"	Black	1000
Snap-Apart Wedge				
SHIM SATW	1-7/16" x 3-3/4"	1/4" to 1/16"	White	1000



MOR CSM7NXTB

7" NXT Metal Cutting Circular Saw w/FREE Blade

Metal Devil® metal cutting circular saws have a sturdy, heavy-duty feel as they cut through metal smoothly and with minimum effort. Built with a unique motor design that maintains torque and operates at the optimum RPM as blade moves through steel, thin steel, aluminum and stainless steel.

- Sure grip ergonomically designed handles help steady saw while cutting
- NEW! Quick Release Metal Chip Collection collects virtually all chips
- Upper chamber minimizes sparks & deadens sound
- Guide arrows & sight opening for easier blade position - beveled (0-45°)
- 7" & 9" saw cuts edges w/laser line cutting guide- batteries not required



Metal Devil NXT

SPECIFICATIONS		INCLUDES
• Max. Cutting Depth	2-3/8"	• NXT Blade
• No Load Speed	3800 RPM	• Wrench
• AMPS	13	• Safety Goggles
• Watts	1560	• Ear Plugs
• Cord Length	7'	• Carrying Case
• Arbor Diameter	20 mm	
• Net Weight	13.0 lbs.	

MOR CSM740NSC



7" NXT Metal Cutting Circular Blade

- Combines strength, long life, and technology in one complete package.
- Manufacturing processes combine plate technology and carbide science resulting in premium cutting performance in demanding applications.



ITEM CODE	BLADE DIA.	NO. OF TEETH	ARBOR	APPLICATIONS
CSM740NSC	7"	40	20mm	Steel

RECIPROCATING SAW BLADES

Master Cobalt® Metal



- Blade widths 3/4" provides flexibility
- Straight tooth pitch gives a smooth cutting action
- Bi-metal construction for long cutting life and heat and wear resistant



ITEM CODE 50/PACK	LENGTH	WIDTH	THICKNESS	TPI
MOR RB614T50	6"	3/4"	0.035"	14
MOR RB618T50	6"	3/4"	0.035"	18
MOR RB624T50	6"	3/4"	0.035"	24

ADVANCED BI-METAL HOLE SAWS



Engineered for optimized cutting performance and life. Exceptional durability yields cost-per-cut savings over other saws when cutting stainless steel, machinable metals, nail-embedded woods and plastics.



ITEM CODE	DIAMETER	PIPE TAPS	PIPE ENTR.	ITEM CODE	DIAMETER	PIPE TAPS	PIPE ENTR.
MOR MHS14	7/8"	3/4"	1/2"	MOR MHS28	1-3/4"	1-1/2"	1-1/4"
MOR MHS16	1"			MOR MHS32	2"		1-1/2"
MOR MHS18	1-1/8"	1"	3/4"	MOR MHS34	2-1/8"		
MOR MHS19	1-3/16"			MOR MHS36	2-1/4"	2"	
MOR MHS20	1-1/4"			MOR MHS38	2-3/8"		
MOR MHS22	1-3/8"		1"	MOR MHS40	2-1/2"		2"
MOR MHS24	1-1/2"	1-1/4"					

BI-METAL JIG SAW BLADES

- Used primarily for cutting ferrous and non-ferrous metals.
- Hard, durable high speed tooth points electron beam welded to spring steel backer for toughness and stability during cutting.

T-SHANK



ITEM CODE 5/PACK	ITEM CODE 25/PACK	LENGTH	WIDTH	THICKNESS	TPI	APPLICATION
MOR SB0314C5	MOR SB0314T25	3"	3/8"	.035"	14	Steel and non-ferrous metal 1/8" thick and up
MOR SB0318C5	MOR SB0318T25	3"	3/8"	.035"	18	Metals over 18 gauge, tubing, conduit
MOR SB0324C5	MOR SB0324T25	3"	3/8"	.035"	24	Thin metal, plastic, fine cuts under 18 gauge

STEP DRILL KIT

4 PC.

ITEM CODE	CONTAINS
MOR ESDKIT01	ESD01,ESD03,ESD04,ESD05



UNIVERSAL SHANK



ITEM CODE 5/PACK	ITEM CODE 25/PACK	LENGTH	WIDTH	THICKNESS	TPI	APPLICATION
MOR SB2718C5	MOR SB2718T25	3"	3/8"	.035"	18	Metal 18 gauge to 1/8"
MOR SB2724C5	MOR SB2724T25	3"	3/8"	.035"	24	Metal and non-ferrous metal up to 1/8"

XLT TAPPER

Tap More Holes • Save More Time • Create Precise Threads

Champion Cutting Tool's Brute Platinum XLT Tapper was designed to increase tapping productivity when threading large amounts of holes in ferrous and non-ferrous metals. Outperforming the traditional way of tapping, the XLT Tapper taps holes 10X faster than handheld tapping using a tap wrench. The XLT Tapper is the perfect tool for various industries including architectural metal and glass, steel fabrication, elevator maintenance, automotive, MRO and more...



- Adjustable depth-stop controls threading depth
- When Finished Tapping, Pull Back To Activate Auto Reverse
- Pivoting tap collet for trouble-free tap alignment
- Spindle clutch for safer jam-free tapping

Specifically engineered for heavy duty applications on site or in the shop, the XLT Tapper can tap steel/ferrous materials from #10 up to 9/16" (14mm) and aluminum/non-ferrous materials from #10 up to 5/8" (16mm). High tech features such as auto reverse, speed control, and pivoting tap collet reduce tap breakage saving you time and money on the job. With the operator in mind, the XLT Tapper is easy to use and lightweight, featuring a depth-stop to control threading depth, and includes a spindle clutch for safer jam-free tapping. For optimal performance, Brute Platinum XL22 Spiral Point Taps and BruteLube Cutting Fluid are recommended for fast and easy tapping.

ITEM CODE	SPECIFICATIONS	INCLUDES
CHA XLT	<ul style="list-style-type: none"> • Cutter Capacity Steel #10 up to 9/16" (14mm) Aluminum #10 up to 5/8" (16mm) • Motor 450W • Net Weight 6.0 lbs. 	<ul style="list-style-type: none"> • Tapper • Side Handle • Depth Gauge • 4mm Hex Ke • Operating Manual • Carrying Case


XL22 SPIRAL POINT TAPS



For Top Performance, use with the XLT TAPPER;



A powerhouse tool on its own, the XL22 tap can now maximize threading productivity with the help of the XLT Tapper. The XLT Tapper's hightech features were specifically engineered to eliminate operator error often experienced when hand tapping. With the Brute Tap System, you will thread the perfect hole every time! The Brute Platinum® XL22 is a three flute, plug style, heavy duty, surfaced treated tap, with a necked shank made from special steel.

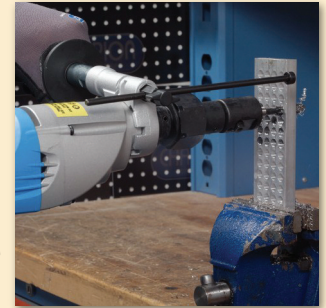

ITEM CODE XL22	ITEM CODE XL22	ITEM CODE XL22	ITEM CODE XL22
CHA XL22-4-40	CHA XL22-12-24	CHA XL22-3/8-16	CHA XL22-1/2-20
CHA XL22-6-32	CHA XL22-1/4-20	CHA XL22-3/8-24	CHA XL22-5/8-11
CHA XL22-8-32	CHA XL22-1/4-28	CHA XL22-7/16-14	CHA XL22-5/8-18
CHA XL22-10-24	CHA XL22-5/16-18	CHA XL22-7/16-20	CHA XL22-3/4-10
CHA XL22-10-32	CHA XL22-5/16-24	CHA XL22-1/2-13	CHA XL22-3/4-16

• All 3 per pack

CUTTING FLUID & WAX

Multipurpose cutting and tapping fluid and wax, is formulated to extend tool life, reduce chip welding and clings to the tool at any angle, including overhead operations. Continuous shield against friction and heat, reducing tool costs and work piece scrap. Provides a close tolerance precision finish. Effective on stainless steel, aluminum, and exotic alloys.



ITEM CODE	DESCRIPTION
CHA XLUB-4	4 oz. Fluid
CHA XLUB16	16 oz. Fluid
CHA XLUB-128	1 gallon Fluid
CHA XLUB-WAX-2	2 oz. Wax
CHA XLUB-WAX-16	16 oz. Wax
CHA XLUB-STICK-16	16 oz.

DRILL & SCREW EXTRACTORS

COMBINATION SET

Left hand, spiral flute, for the removal of broken screws, studs, bolts or pipe fitting. The left hand rotation of the tapered flutes forces out almost any right hand threaded part. Penetrating oil can be helpful in removing rusty or corroded parts.

ITEM CODE	INCLUDES
CHA X1-XLSLH	XL5 Left Hand drills 5/64", 7/64", 5/32", 1/4", 19/64" and screw extractors #1-5
CHA X1-70SLH	70S Left Hand drills 5/64", 7/64", 5/32", 1/4", 19/64" and screw extractors #1-5



SCREW EXTRACTOR SET

ITEM CODE	INCLUDES
CHA X1-1-5	extractors #1-5
CHA X1-1-6	extractors #1-6



INDUSTRIAL TWIST DRILLS

Brute Platinum®XL5 jobber length drills have a 135° split point and are an exclusive combination of premium high speed steel and superior geometry.

XL5 JOBBER LENGTH TWIST DRILLS



Fractional & Numerical Sizes

ITEM CODE XL5	FLUTE LENGTH	OVERALL LENGTH	ITEM CODE XL5	FLUTE LENGTH	OVERALL LENGTH
CHA XL5-1/16	7/8"	1-7/8"	CHA XL5-5/16	3-3/16"	4-1/2"
CHA XL5-5/64	1"	2"	CHA XL5-21/64	3-5/16"	4-5/8"
CHA XL5-3/32	1-1/4"	2-1/4"	CHA XL5-11/32	3-7/16"	4-3/4"
CHA XL5-7/64	1-1/2"	2-5/8"	CHA XL5-23/64	3-1/2"	4-7/8"
CHA XL5-1/8	1-5/8"	2-3/4"	CHA XL5-3/8	3-5/8"	5"
CHA XL5-9/64	1-3/4"	2-7/8"	CHA XL5-25/64	3-3/4"	5-1/8"
CHA XL5-5/32	2"	3-1/8"	CHA XL5-13/32	3-7/8"	5-1/4"
CHA XL5-11/64	2-1/8"	3-1/4"	CHA XL5-27/64	3-15/16"	5-3/8"
CHA XL5-3/16	2-5/16"	3-1/2"	CHA XL5-7/16	4-1/16"	5-1/2"
CHA XL5-13/64	2-7/16"	3-5/8"	CHA XL5-1/2	4-1/2"	6"
CHA XL5-7/32	2-1/2"	3-3/4"	CHA XL5-7	2-7/16"	3-5/8"
CHA XL5-15/64	2-5/8"	3-7/8"	CHA XL5-16	2-3/16"	3-3/8"
CHA XL5-1/4	2-3/4"	4"	CHA XL5-21	2-1/8"	3-1/4"
CHA XL5-17/64	2-7/8"	4-1/8"	CHA XL5-25	1-7/8"	3"
CHA XL5-9/32	2-15/16"	4-1/4"	CHA XL5-29	1-3/4"	2-7/8"
CHA XL5-19/64	3-1/16"	4-3/8"	CHA XL5-30	1-5/8"	2-3/4"



• Fractional sizes: 12 per package through 9/32" • 6 per package 19/64" through 1/2"
• Numerical sizes: 12 per package

29 PC. TWISTER SET

1/16 to 1/2 x 64ths



ITEM CODE	DESCRIPTION
CHA TWISTER-XL5	XL5 Brute Platinum® Jobber Drills

RZR CERMET CIRCULAR SAW BLADES

New

Ideal for cutting steel plate, angle iron, pipe, all thread, and more. Longer tool life and smoother, bur-free cutting than carbide.

- Razor sharp cermet teeth resist heat and friction
- Hardened steel body increases tool life and faster cutting
- Thin kerf design reduces cutting resistance
- Improved blade stability in straight running cuts
- Unique cermet tooth geometry engineered specifically for steel cutting
- Noise reduction due to laser slits



STEEL CUTTING BLADES

ITEM CODE	DIA"	NO. OF TEETH	KERF (mm)	ARBOR	MAX RPM	MAX THICKNESS OF CUT
CHA RZR-7-36-S	7"	36	1.4	20mm	5500	5/16"
CHA RZR-9-44-S	9"	44	2.0	1"	3500	1/5"
CHA RZR-12-54-S	12"	54	2.2	1"	1700	1"
CHA RZR-14-64-S	14"	64	2.4	1"	1500	1"

COMBINATION DRILL & TAP



Champion DT22 Hex Drill & Tap combo with a hex shank creates holes and taps in a single operation. No center drilling or punching is required.

- Champion's exclusive taper neck design significantly reduces breakage.
- 135° helical point permits holes and threads to be cut at high speeds.
- Superior strength & durability provided by high molybdenum, high speed steel

DT22HEX



ITEM CODE	HEX SHANK	DRILL DIAMETER	DRILL LENGTH	OVERALL LENGTH	THREAD LENGTH
CHA DT22HEX-6-32	1/4"	7/64"	0.31"	2.17"	7/16"
CHA DT22HEX-8-32	1/4"	#29	3/8"	2.45"	1/2"
CHA DT22HEX-10-24	1/4"	#25	3/8"	2.61"	5/8"
CHA DT22HEX-10-32	1/4"	#21	3/8"	2.61"	5/8"
CHA DT22HEX-12-24	1/4"	#17	0.47"	2.70"	11/16"
CHA DT22HEX-1/4-20	1/4"	#6	0.53"	2.89"	3/4"

• Also available in National Fine Thread sizes 1/4"-28 through 1/2"-20.
• Packaged individually

321 SPIRAL POINT TAPS

Champion Spiral Point Taps are commonly referred to as "gun" taps. Spiral point taps cut with a shearing action that "shoots" the chip ahead of the tap.

- Supplied in standard "H" limits and the most common plug style.
- Shallow straight flutes for a sturdy rigid design, minimizing tap breakage.
- Engineered specifically for tapping of "through holes" or deep blind holes where a shoulder exists for chips to collect.



ITEM CODE	ITEM CODE
CHA 321-6-32	CHA 321-10-32
CHA 321-8-32	CHA 321-12-24
CHA 321-10-24	CHA 321-1/4-20

308 HIGH SPEED TAPS

308 High Speed Hand Taps perform consistently in production set-ups and are designed for general purpose tapping in a variety of materials. They are supplied in standard "H" limits that will provide an adequate "class of fit" for standard tapping applications.

- Manufactured with form relieved threads that reduce friction and wear.
- Cut smoothly and thread more holes per tap set-up.
- P (Plug) - most commonly used, distributes load across 3-5 threads of chamfer

Plug - 3 to 5 pitches

The most common chamfer for use by hand or machine in through or blind holes. This chamfer is more efficient than a bottoming chamfer.

ITEM CODE	ITEM CODE
CHA 308-6-32-P	CHA 308-10-32-P
CHA 308-8-32-P	CHA 308-12-24-P
CHA 308-10-24-P	CHA 308-1/4-20-P



CARBIDE TIPPED HOLE CUTTERS



CT3

The solution for drilling holes in sheet metal up to 1/8" thick.

ITEM CODE CT3

CHA CT3-5/8
CHA CT3-11/16
CHA CT3-3/4
CHA CT3-13/16
CHA CT3-7/8

ITEM CODE CT3

CHA CT3-15/16
CHA CT3-1
CHA CT3-1-1/16
CHA CT3-1-1/8

ITEM CODE CT3

CHA CT3-1-3/16
CHA CT3-1-1/4
CHA CT3-1-5/16
CHA CT3-1-3/8



CT5

The cutting tool for ferrous/non-ferrous materials up to 3/16" thick.

ITEM CODE CT5

CHA CT5-7/8
CHA CT5-15/16
CHA CT5-1
CHA CT5-1-1/8

ITEM CODE CT5

CHA CT5-1-1/4
CHA CT5-1-3/8
CHA CT5-1-1/2
CHA CT5-1-5/8

ITEM CODE CT5

CHA CT5-1-3/4
CHA CT5-2
CHA CT5-2-1/8



CT7

Best for drilling holes up to 1" thick ferrous/non-ferrous materials.

ITEM CODE CT7

CHA CT7-7/8
CHA CT7-15/16
CHA CT7-1
CHA CT7-1-1/8

ITEM CODE CT7

CHA CT7-1-1/4
CHA CT7-1-3/8
CHA CT7-1-1/2
CHA CT7-1-5/8

ITEM CODE CT7

CHA CT7-1-3/4
CHA CT7-2
CHA CT7-2-1/8



All CT5 and CT7; = *3/8" shank, **=1/2" shank

CT3 SET

Up to 1/8" Thick Sheet Metal

ITEM CODE

INCLUDES

CHA CT3P-SET-1 1 each 5/8", 3/4", 7/8", 1", 1-1/8" and QCD



CT5 SET

Up to 3/16" Thick Steel

ITEM CODE

INCLUDES

CHA CT5P-CONDUIT-1 1 ea. 7/8", 1-1/8", 1-7/32", 1-3/8", 1-3/4", 2", 2-1/2"



CT7 SET

Up to 1" Thick Steel

ITEM CODE

INCLUDES

CHA CT7P-SET-4 General Maintenance - 1 each 5/8", 3/4", 7/8", 1", 1-1/8"



CT9 SET

Up to 2" Thick Steel

ITEM CODE

INCLUDES

CHA CT9P-DOOR-SET 1 each 7/8", 1" - CT7, and 1 each 1-1/2", 2-1/8" - CT9



COUNTERSINKS - ZERO FLUTE-CSK



Champion Zero Flute Countersinks are the high performance solution for smooth, chatterless finish in metal, plastic or wood. The single cutting edge is free cutting and provides fast stock removal. They are especially popular for aluminum frame storefront installation, glass and window design industry, and architectural metalwork.

- 1/4" hex shank is specifically for quick-change use in portable drilling
- Free-cutting - easily sharpened

1/4" HEX SHANK

ITEM CODE	SCREW SIZE	SHANK DIAMETER	OVERALL LENGTH	BODY DIAMETER
CHA CSK-3SH	Nos. 2, 3, 4	Hex	1-27/32"	1/4"
CHA CSK-8SH	Nos. 5, 6, 8	Hex	2"	11/32"
CHA CSK-18SH	Nos. 10, 12, 14	Hex	2-5/16"	9/16"



82° PILOTLESS ROUND SHANK

ITEM CODE	DIAMETER OF CUT	SHANK DIAMETER	OVERALL LENGTH	BODY DIAMETER
CHA CSK3S	.073 to 15/64"	1/4"	1-3/4"	1/4"
CHA CSK18	3/16" to 17/32"	1/4"	1-7/8"	9/16"
CHA CSK26	.307 to 25/32"	1/2"	2-5/8"	13/16"
CHA CSK36	.431 to 7/8"	1/4"	2-13/16"	1-1/8"
CHA CSK48	1/2" to 1-15/32"	1/4"	3-1/2"	1-1/2"

ITEM CODE	SCREW SIZE	SHANK DIAMETER	OVERALL LENGTH	BODY DIAMETER
CHA CSK5S	Nos. 4, 5	1/4"	1-1/2"	1-17/16"
CHA CSK6S	No. 6	1/4"	1-1/2"	19/64"
CHA CSK8S	No. 8	1/4"	1-5/8"	11/32"
CHA CSK10S	No. 10	1/4"	1-5/8"	25/64"



MULTI-PURPOSE DRILL BITS

Multi-Purpose drill bits are suitable for drilling through steel into masonry materials in one operation without changing the bit due to the special cutting edge geometry and the diamond-ground cutting surfaces of the special carbide tip. The titanium carbide is extremely wear resistant.



ITEM CODE	OVERALL LENGTH	ITEM CODE	OVERALL LENGTH
CHA MPB-1/8	2-3/4"	CHA MPB-3/8	4-3/4"
CHA MPB-5/32	3-1/4"	CHA MPB-1/2	6"
CHA MPB-3/16	3-1/4"	CHA MPB-SET5	Contains 1 ea. 1/8", 5/32", 3/16", 1/4", 5/16"
CHA MPB-1/4	4"		
CHA MPB-5/16	4-3/4"		

* Packaged individually

* Drills should be used in rotary mode only (not percussion)

FIBER DISCS



United Abrasives/SAIT™ fiber discs are made using a premium resin over resin construction. Packaged in a unique bulk spindle that ensures that each disc remains perfectly flat. This unique design offers easy access and can be retightened to insure that your discs are flat when you need them.

AO

Aluminum Oxide - Specialty **METAL**

- Open coat structure for more material removal and better finishing.
- Vulcanized fiber backing for heavy duty sanding.
- Resin over resin construction for a strong bond, resistant to heat/moisture

ITEM CODE	SIZE	GRIT	CTN QTY.
UA 52416	4-1/2" x 7/8"	16	100
UA 52424	4-1/2" x 7/8"	24	100
UA 52436	4-1/2" x 7/8"	36	100
UA 52450	4-1/2" x 7/8"	50	100
UA 52460	4-1/2" x 7/8"	60	100
UA 52480	4-1/2" x 7/8"	80	100
UA 52400	4-1/2" x 7/8"	100	100
UA 52420	4-1/2" x 7/8"	120	100
UA 52716	7" x 7/8"	16	100
UA 52724	7" x 7/8"	24	100
UA 52736	7" x 7/8"	36	100
UA 52750	7" x 7/8"	50	100
UA 52760	7" x 7/8"	60	100
UA 52780	7" x 7/8"	80	100
UA 52700	7" x 7/8"	100	100
UA 52720	7" x 7/8"	120	100



BACKING PADS

For Resin Fiber Discs

NOTE: Pad nut must be purchased separately. This backing pad is not to be used with SAIT-LOK™ quick change fiber discs

ITEM CODE	SIZE	ARBOR	MAX RPM.	BOX QTY
UA 95011	4-1/2"	5/8"	11,000	1
UA 95018	7"	5/8"-11 Thread	8,500	1



AZX

Zirconium

METAL **STAINLESS**

- Premium zirconium grain to reduce heat build up and reduce loading.
- For stainless steel, high tensile steel, titanium, aluminum, ferrous metals.
- Vulcanized fiber backing for heavy duty sanding.
- Resin over resin construction for a strong bond, resistant to heat & moisture.
- Available with SAIT-LOK quick-change hub which requires fewer changes.

ITEM CODE	SIZE	GRIT	CTN QTY.
UA 69224	4-1/2" x 7/8"	24	100
UA 69226	4-1/2" x 7/8"	36	100
UA 69250	4-1/2" x 7/8"	50	100
UA 69260	4-1/2" x 7/8"	60	100
UA 69280	4-1/2" x 7/8"	80	100
UA 69624	7" x 7/8"	24	100
UA 69636	7" x 7/8"	36	100
UA 69650	7" x 7/8"	50	100
UA 69660	7" x 7/8"	60	100
UA 69680	7" x 7/8"	80	100




FLAP DISCS



- Flap discs are constructed by layering coated abrasive flaps so they wear away and expose new, sharp grain
- They increase productivity and reduce total grinding and finishing costs by grinding, blending & finishing in 1 step



REGULAR DENSITY




SAIT ENCORE PLUS+

Regular Density

- Premium zirconium grain on a durable polyester-cotton backing provides fast cutting action and long life
- Will not contaminate stainless steel

METAL
STAINLESS
ALUMINUM



Conical Shape-Type 29

ITEM CODE	DIAMETER	ARBOR	GRIT	MAX RPM	BOX QTY	CTN QTY
UA 72238	4-1/2	7/8	36	13,300	10	40
UA 72239	4-1/2	7/8	40	13,300	10	40
UA 72240	4-1/2	7/8	60	13,300	10	40
UA 72241	4-1/2	7/8	80	13,300	10	40
UA 72338	4-1/2	5/8-11	36	13,300	10	40
UA 72339	4-1/2	5/8-11	40	13,300	10	40
UA 72340	4-1/2	5/8-11	60	13,300	10	40
UA 72341	4-1/2	5/8-11	80	13,300	10	40



THIN HIGH SPEED CUT-OFF WHEELS

A60S

General Purpose

METAL

- For general purpose cutting of all ferrous metals.
- Extremely fast cutting and long life for steel, pipe, rebar, channel and angle iron.
 - UA 23101 is the industry standard for fast cutting ferrous metals with a 4-1/2" grinder.



ITEM CODE	DIAMETER	WIDTH	BORE	MAX RPM	BOX QTY	CTN QTY
UA 23101	4-1/2"	.045	7/8"	13,300	50	200

GRINDER



BOS GWS10-45P

4-1/2" Angle Grinder w/No-Lock-On Paddle Switch

- Multi-grip paddle switch for user control and comfort, and it has a no-lock-on switch shuts the motor off after the switch is released. Direct-motor cooling, giving it higher overload capabilities.
- Carbon brushes - more durable than previous-generation brushes



SPECIFICATIONS	INCLUDES
• Amperage	10
• Length	12"
• No Load RPM	11,500
• Rating	120V
• Spindle Thread	5/8-11 UNC
	• Backing Flange
	• Lock Nut
	• Spanner Wrench
	• Grinding Guard
	• Vibration Control Side Handle

TRIGGERFOAM PRO™



WINDOW & DOOR

Window and Door formula does not distort window and door frames when expanded. Adheres to wood, metal, masonry and concrete. Seals gaps and joints, insulates, stops air infiltration and saves time and money. Ideal for use around pipes, wires and ductwork.

TriggerFoam Pro	Hilti
Pro Windows/Doors	CF-812
29 oz.	23 oz.
Orange	Off-White
Gun Applied	Gun Applied
Flame: 0	Flame: 0
Smoke: 10	Smoke: 5
Type V Res. Fire Block Meets E814	Not a Fire Block
18 mo. Shelf life	12 mo. Shelf life



ITEM CODE	DESCRIPTION	CTN. QTY.
POW 08134P	TriggerFoam Pro™ Window & Door Formula 29 oz	12

CODE LISTED
ICC-ES ESR-3263
CATEGORY 1
Fireblocking in Residential Construction

APPLICATION TOOL



ITEM CODE	DESCRIPTION	CTN. QTY.
POW 08128	TriggerFoam Pro™ Deluxe Metal Gun, Black	1

SAFETY

TK-SAFETYKIT 1

- H412002 WERNER® Harness
- C411100 Werner Double Lanyard
- R530011 WERNER® 11' Web Self Retracting Lifeline
- WERNER® Backpack



SAFETY HARNESS

- WER H412002 Universal
- Back D-Ring, Pass Through Legs
- PASS THROUGH CHEST BUCKLE
- IMPACT INDICATOR
- Clearly shows if the harness has been involved in a fall
- LABEL PROTECTION
- Web cover to extend wear
- SLIDING BACK PAD
- Adjustable for universal fit on different body sizes



310lb Rated

- LANYARD KEEPER
- Keeps the lanyard secure, out of the way when not in use
- STRAP KEEPERS
- Keeps excess webbing organized and out of the way
- LEG STRAP
- Available with tongue buckles, ideal when multiple workers use same harness, or convenient pass through buckles

SCREWDRIVING BITS Insert & Power

PHILLIPS

Insert bits are commonly used with a bit holder in power tool applications. This combination is economical, provides flexibility and allows fasteners to be magnetically held by the bit. **Power bits** are placed directly into the power tool chuck.

1/4" Hex Insert Bits

ITEM CODE	PT. SIZE	OVERALL LENGTH
APE 440-1X	#1	1"
APE 440-2X	#2	1"
APE 440-3X	#3	1"
APE 440-4X	#4	1-5/16"
APE 440-22X	#2	2"

1/4" Hex Insert Bits Limited Clearance

ITEM CODE	PT. SIZE	OVERALL LENGTH
APE 446-1X	#1	1"
APE 446-2X	#2	1"

1/4" Hex Power Drive

ITEM CODE	PT. SIZE	OVERALL LENGTH
APE 491-X	#1	1-15/16"
APE 491-AX	#1	2-3/4"
APE 491-BX	#1	3-1/2"
APE 491-CX	#1	6"
APE 492-X	#2	1-15/16"
APE 492-AX	#2	2-3/4"
APE 492-BX	#2	3-1/2"
APE 492-CX	#2	6"
APE 493-X	#3	1-15/16"
APE 493-AX	#3	2-3/4"
APE 493-BX	#3	3-1/2"
APE 493-CX	#3	6"
APE 494-X	#4	1-15/16"

MAGNETIC

1/4" Holders

ITEM CODE	OVERALL LENGTH
MBH	3"
M-490-6	6"

1/4" Power Drive Nutsetters

ITEM CODE	SIZE	OVERALL LENGTH	SCREW SIZE
MDA-08	1/4"	1-3/4"	#6-8
MDA-10	5/16"	1-3/4"	#10-#12
MDA-12	3/8"	1-3/4"	#14
MDB-08	1/4"	2-9/16"	#6-8
MDB-10	5/16"	2-9/16"	#10-#12
MDB-12	3/8"	2-9/16"	#14
MDB-14	7/16"	2-9/16"	#14
MSHL-5/16	5/16"	6"	#10-#12

CUT RESISTANT GLOVES



G-TEK® GREAT WHITE® 3GX™

Seamless Knit Dyneema® Diamond/Lycra Glove

- Provides excellent dexterity, tactile sensitivity, cut resistance
- Polyurethane coated palm and fingertips for great abrasion resistance, excellent puncture resistance and outstanding wet/dry grip
- Knit Wrist helps prevent dirt from entering
- Washable, resistant to chemicals, water, & ultraviolet light
- **EN 388 Results; Abrasion: 4, Cut: 4, Tear: 4, Puncture: 1**



ANSI

3

ITEM CODE	DESCRIPTION	PAIR
GLO CR3-S	Gray Poly, Small	1
GLO CR3-M	Gray Poly, Medium	1
GLO CR3-L	Gray Poly, Large	1
GLO CR3-XL	Gray Poly, XL	1
GLO CR3-XXL	Gray Poly, XXL	1

Construction Fasteners

Elco Construction Products

- Standard Self-Drilling Screws- Steel & Stainless Steel
- Dril-Flex® Structural Self-Drilling Screws
- Bi-Flex® 300 Series Stainless Steel
- Bi-Metal Self-Drilling Screws
- Heavy Duty Self-Drilling Screws- Drills Up to 1/2" Thick Steel
- Alumi-Flex™ 300 Series Stainless Steel Self-Drilling Screws
- Drilit® Wood-to-Metal Self Drilling Screws
- Aggre-Gator® 300 series Stainless Steel Bi-Metal Concrete Anchors
- UltraCon® Masonry Fastening System
- Crete-Flex® 410 Stainless Steel Masonry Fastening System
- Fab-Lok® Fasteners- Maintain Panel Integrity in High-Stress Environments
- Tap-Flex™ Structural E-Form Thread Forming Screws
- HangerMate® Threaded Rod Anchoring System
- Self-Drilling X Metal Screws
- Sheating-to-CFS



Commercial Fasteners

- Bucket of Bolts!
- Hex Head Cap Screws/Tap Bolts/ Eyebolts/Hanger Bolts
- Carriage Bolts w/Nuts
- Hex Head Lag Bolts
- Socket Products
- Drywall & Decking Screw
- A325 Structural Bolt Fastening System
- A325 Tension Control Bolt System
- Weld Studs
- BoxBolt™ Expansion Anchors
- Anchor Bolts/U-Bolts
- Threaded Rod/Rod Coupling Nuts
- Finished Hex Nuts/ Heavy Hex Nuts
- Serrated Flange/Kep/Wing/Machine Screw Acorn Cap/T-Nuts
- Nylon Insert Lock Nuts
- Flat Washers/ Lock Washers
- Sheet Metal Screws/ Machine Screws
- Serrated Flange/Self-Piercing/ Green Grounding Screws
- Blind Rivets/Rivet Nuts
- Cable & Wire Management
- Bolt Securing Systems



Commercial Fasteners Stainless Steel

- Hex Head Cap Screws/Tap Bolts
- Carriage/Lag Bolts
- Threaded Rod/Nuts
- Washers
- Topseal™ H3 304 Stainless Steel Self-Tapping Screws
- AllFlex™ Stainless Steel Self-Tapping Screws
- Machine Screws



Security Products

- Secure Bolt® Sleeve Anchors
- Secure Wedge-Bolt® Screw Anchors
- Spike® Pre-Expanded Anchors
- UltraCon® Torx® Tamper-Resistant Masonry Fasteners
- Trident Nuts
- Break-Away Nuts
- Break-Away Bolts/Pre-Cast Concrete Inserts
- Self-Drilling Screws Torx® 6-Lobe Tamper-Resistant
- Sheet Metal Screws Torx® 6-Lobe Tamper-Resistant
- Cap Screws Torx® 6-Lobe Tamper-Resistant
- Cap Screws Torx Plus® Tamper-Resistant Sheet Metal Screws
- Torx Plus® Tamper-Resistant Trident Screws
- Machine Screws/Sheet Metal Screws
- One-Way Screws/Sex Bolts Barrel Nuts/ Shoulder Screws
- Spanner Machine Screws/Sheet Metal Screws
- Pin-In-Hex Socket Screws
- Installation & Removal Tools/Tool Sets
- Screw Assortments/Storage
- Security Sealants



Anchoring Systems

Powers Fasteners

- Power-Stud+™ Code Listed Strength Design Wedge Expansion Anchors
- Wedge-Bolt®+ Screw Anchors
- Lok-Bolt AS™ Sleeve Type Expansion Anchors
- PowerBolt®/Power-Bolt®+ Heavy Duty Sleeve Anchors
- Atomic+ Undercut™ Heavy Duty Undercut Anchors
- Tapper+™/Tapper+™ Xtreme Concrete Screws
- Carbide Drill Bits
- Bang It™/Wood-Knocker™ Cast-In-Place Concrete Inserts
- Vertigo®/Vertigo™+ Rod Hanging System
- Snake+™/Hollow Set Dropin™ Anchors
- Smart DI+ Dropin™ Expansion Anchors
- Zamac Nailin®/ Safe-T+ Pin™ Nail-In Anchors
- Wall-Dog®/Zip-It® Light Duty Anchors

Anchoring Systems

- AC100+ Gold®/PE1000+®/Pure110+™ Adhesive Anchoring Systems
- Adhesive Anchoring Accessories
- PowerFoam™/TriggerFoam™ Pro Expansion Foams
- PowerStick™ Adhesive Sealant
- Trak-It® Gas Fastening Systems
- Powder Actuated Fastening Systems



Sealants & Adhesives



Power Tools

DEWALT Power Tools & Accessories

- Abrasives
- Fastening & Screwdriving Bits
- Carbide Drill Bits



Bosch Power Tools



Cutting Tools

Champion Cutting Tools



- Industrial Twist Drills
- Mechanics Length Drills
- Silver & Deming/3/8" Shank Drills
- Aircraft Extension/Multi-Purpose Drills
- Porcelain Tile Hole Cutters
- Countersinks
- Multi-Step Drills
- Reamers
- High Speed Taps
- Combination Drills & Taps/Tap Wrenches
- Magnetic Drill Presses
- Annular Cutters/Cutting Fluid & Wax
- Carbide Tipped Annular Cutters
- Carbide Tipped Hole Cutters



United Abrasives

- Grinding Wheels
- Thin High Speed Cut-Off Wheels .045
- Chop Saw Wheels/ Portable Saw Cut-Off Wheels
- Flap Discs and Fiber Discs
- Coated Abrasives
- Hand Pads/Wire Wheels/ Wire Brushes



Cutting Tools

M.K. Morse

Metal Devil NXT® Metal Cutting
Circular Saw Blades



- Reciprocating Saw Blades
- Hole Saws and Kits
- Arbors/Pilot Drills & Accessories
- Jig Saw Blades
- Step Drills
- Hacksaw Blades & Frames
- Portable Band Saw Blades/
Hand Saws & Blades



Diamond Products

- Diamond Wet Core Bits/
Drilling Equipment
- Diamond Dry Blades

Hand Tools

- Measuring & Layout Tools
- Lasers and Levels
- Knives & Blades
- Staplers & Finishing Tools
- Saws and Hammers
- Screwdrivers and
Wrenches
- Pry and Claw Bars
- Chisels and Punches
- Locking Tools and Pliers
- Clamps and Vises
- Sockets, Wrenches,
and Ratchets
- Markers/Marking Paint
- Snips, Tinners,
HVAC Tools
- Bolt and Rebar Cutters
- Hand-Held Vacuum Cups
- Utility Knives



Metal Framing Systems



- Channels
- Channel Nuts
- Angle and Flat Plate Fittings
- "Z", "U", Wing Shape Fittings/
Post Bases
- Brackets/Braces/Beam Clamps/
Seismic Fittings
- Pipe/Conduit Supports
- Pipe & Tubing Clamps
- Beam Clamps/Prime Angle



Safety Products

Fall Protection

- Full Body Harnesses
- Shock Absorbing and
Positioning Lanyards
- Self-Retracting Lifelines
- Vertical Systems
- Horizontal Systems
- General Anchorage Connectors
- Beam Anchors
- Concrete Anchors
- Roof Anchors
- Confined Space Rescue
- Rescue and Descent
- Jobsite Safety Kits



Tool Drop Protection

- Coil Extensions
- Webbing Extensions
- Wristbands
- Attachment Points
- Spill Control Buckets
- Holsters and Tool Belts
- Safety Pouches



Personal Protection Equipment

- New Hire Safety Kits
- First Aid Kits
- Barricade Tapes
- Head and Face Protection
- Gloves
- Safety Glasses and Goggles
- Ear Protection
- Knee and Back Protection
- Hi-Visibility Vests, Jackets, T-Shirts,
Sweatshirts and Pants
- Hi Visibility Raingear
- Winter Liners and Headwear
- Arc and Flame Resistant Wear
- Protective Clothing
- Welding Supplies
- Work Lights/Electrical Cords
- Fire Extinguishers and Traffic Safety
- Safety Signs, Tags and Labels
- Jobsite Storage Equipment
- Material Handling



Ladders



Firestopping Products & Systems



Industrial Hardware Supplies

- Shims
- Jobsite Storage Equipment
- Material Handling
- Janitorial/Cleaning Products
- Adhesives & Sealants
- Welding Supplies
- Electrical, Duct,
Painters Tapes



Lifting Equipment

Slings

Web, Round & Wire Rope



Hoists

- Manual: Hand Chain &
Lever
- Powered: Electric Chain
- Trolleys: Manual & Powered



Rigging

- Shackles: Anchor, Chain & Web Sling
- Lifting Hooks:
- Clevis, Grab, Slip
- Sorting, Shank, "S", Rigging

- Chain Slings & Components
- Rings & Links
- Wire Rope Hardware



- Wire Rope Clips &
Mid-Grip Clips

Shoulder Eye Bolts

Hoist Rings

Turnbuckles

Transport Chain & Attachments:

